

BeanDevice® WILLOW® AX-3D

ULP (ULTRA-LOW-POWER) WIRELESS IOT VIBRATION SENSOR

PRODUCT VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE



MQTT TOOLKET FOR IOT
SENSOR




2year
Warranty

MADE IN GERMANY

CE FC [E] R 001A-08148

WiFi
CERTIFIED

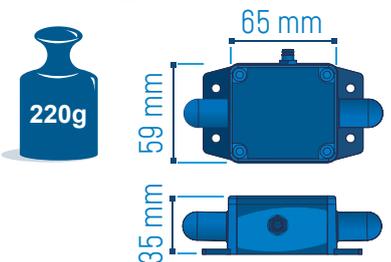

MAIN FEATURES

- ULP (Ultra Low Power) Wifi technology
- Embedded data logger: up to 5 million data points (with events dating)
- High precision accelerometer (measurement range $\pm 2g$) with FFT, PPV (Peak-Particle Velocity) and Amplitude calculations
- Waterproof (IP67/NEMA 6) and Rugged aluminum casing,
- Over the Air Firmware upgrade via WIFI
- Virtual Inclinometer
- USB 2.0 link for device configuration (including firmware upgrade)
- Store and Forward+: lossless data transmission
- Excellent radio link relying on the radio antenna diversity designed by Beanair®
- IOT Ready: integrates MQTT data exchange, an open-source Internet of Things (IOT) protocol
- Smart and Flexible power supply :
 - Internal Rechargeable Lithium Battery (780 mAh)
 - External 5VDC power supply compatible with both USB power and solar energy harvesting

BeanDevice® WILLOW® AX-3D

APPLICATIONS

Test and Measurement



Structural Health Monitoring



Ground Vibration Monitoring




AN OPEN-STANDARD & INDUSTRIAL WIFI TECHNOLOGY

- ULP (Ultra Low power) Wifi – IEEE 802.11 b/g/n
- Lower total cost of ownership-works with existing access points
- Large installed base and consequent broad-based familiarity with configuration, use and troubleshooting at the physical and link layers
- Easy provisioning & IT friendly: our ULP wifi sensors use IP-over-Ethernet networking environment



BeanDevice® WILLOW® AX-3D

MQTT | OPEN-STANDARD INTERNET OF THINGS PROTOCOL.

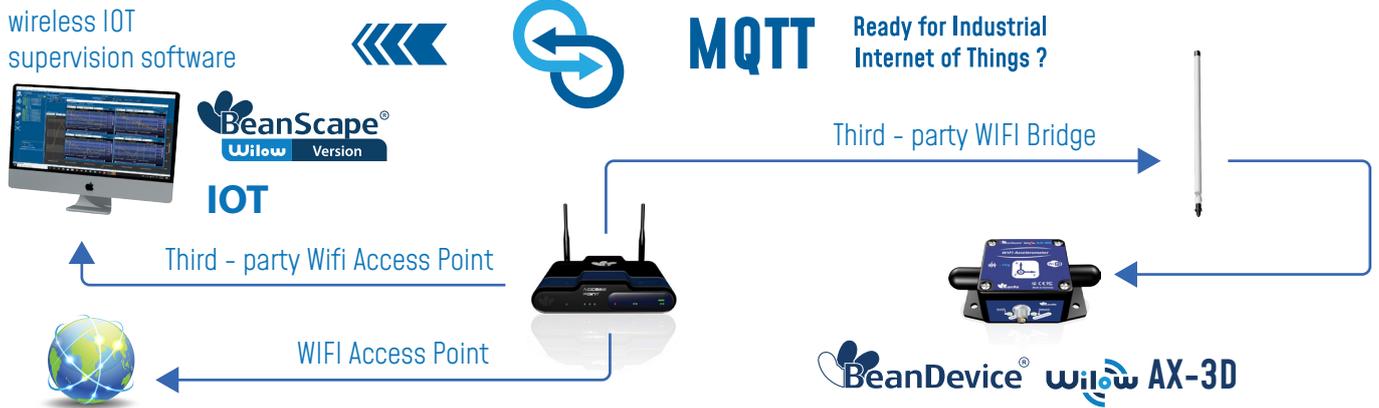

EHR-AUXILIARY POWER SUPPLY COMPATIBLE WITH SOLAR ENERGY HARVESTING 8-24VDC



A RELIABLE WIFI TECHNOLOGY THANKS TO OUR "STORE AND FORWARD+" FUNCTION



The store and forward technique works by storing the message transmitted by the **BeanDevice® Wilow** (wireless DAQ/sensor) to a Wifi access point/ Wifi receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique allows to bring a lossless data transmission.

User can also enable the Hard real-time option; i.e. the message must be received by the Wifi Access Point/Wifi Receiver within the confines of a stringent deadline. It is automatically deleted if it failed to reach its destination within the allotted time span

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

BND-WILOW-WIFI-AX3D-MR-MO-EXPWR-HG

MR - Measurement Range: $\pm 2g$	MO - Mounting option	EXPWR - Auxiliary External Power supply	-HG - High Gain External Antenna 5dBi
2G: $\pm 2g$ measurement range	BR - 90° Mounting bracket		
	M - Magnetic Mounting	EHR - Power supply compatible with solar energy harvesting 8-24VDC	

Example 1: BND-WILOW-WIFI-AX3D-2G-BR

ULP WIFI accelerometer with $\pm 2g$ range with 90° Mounting bracket

Example 2: BND-WILOW-WIFI-AX3D-2G-M

ULP WIFI accelerometer with $\pm 2g$ range with magnetic mounting

Example 3: BND-WILOW-WIFI-AX3D-2G-HG

ULP WIFI accelerometer with $\pm 2g$ range with High Gain External Antennas

MAIN ACCELEROMETER SPECIFICATIONS

Accelerometer technology	High precision accelerometer based on MEMS technology
measurement range	$\pm 2g$
Sensitivity	660 mV/g
Typical non-linearity	$\pm 0.1\%$ FS
Analog to Digital converter	24-bit delta-sigma with temperature compensation Synchronous measurement channel. Data are transmitted in 12-bits format for better network management
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	2 kSPS per axis
Noise spectral density	45 $\mu g/\sqrt{Hz}$
Zero-g Offset Variation from RT over Temp	± 0.2 mg/°C
Sensitivity Variation from RT over Temp	$\pm 2g$ Version : $\pm 0.01\%$ /°C (XY), $\pm 0.02\%$ /°C (Z)
Offset Ratiometric Error	4mg
Sensitivity Ratiometric Error	$\pm 1.25\%$ (X-Y), $\pm 0.2\%$ (Z)
Cross Axis Sensitivity	0.02
Onboard temperature sensor	Range -40°C to +65°C, accuracy $\pm 1^\circ C$
Anti-aliasing Hardware filter	Butterworth 2th order filter
Calibration	Factory calibrated with calibration settings backed up on the sensor Flash memory. Calibration method used : Back-to-back calibrated with a reference sensor. Sensors can be re-calibrated by the user.

ADVANCED VIBRATION ANALYSIS TOOL (AVAILABLE ON BEANSCAPE® WILOW® PREMIUM AND RA)

Software Filter	<ul style="list-style-type: none"> • Low-Pass Infinite Impulse Response Filter (IIR)
Fast Fourier Transform (FFT)	<ul style="list-style-type: none"> • Online and Offline FFT • FFT Window Type (offline FFT only): Recangular/Hamming/Hann/Blackman/Blackman Harris/ Gaussian/Kaiser/Taylor/Triangular/Flattop/Bartlett Hann • Automatic FFT Report (Email Transmission) • Configurable Number of FFT points, 128 to 32768 points
Peak Particle de Velocity (PPV)	<p>Available only on the BeanDevice® Wilow® AX-3D with ±2g of range:</p> <ul style="list-style-type: none"> • PPV Log file (Email Transmission) • Automatic DIN4150-3 report (Email Transmission)
Displacement measurement	<p>Available only on the BeanDevice® Wilow® AX-3D with ±2g of range</p>

REMOTE CONFIGURATION PARAMETERS

Data Acquisition mode (SPS = sample per second)	<ul style="list-style-type: none"> • Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour • Alarm -Low duty cycle: 1s to 24 hour • Streaming mode : 100 SPS by default • Streaming with event-trigger (SET) Mode : 100 SPS by default
Sampling Rate (in streaming mode)	<p>Minimum: 1 SPS per axis Maximum: 2 kSPS per axis</p>
Alarm Threshold	High and Low Levels alarms
Power Mode	Battery Saver & Active power modes

RF SPECIFICATIONS

Wireless Protocol Stack	IEEE 802.11 b/g/n
WSN Topology	Point-to-Point / Star / Cluster-Tree
Crypto Engine	WPA2, WPS2
Data rate	UDP: 16 Mbps TCP: 13 Mbps
RF Characteristics	ISM 2.4GHz. Antenna diversity designed by Beanair®
TX Power	18 dBm @ 1 DSSS 14.5 dBm @ 54 OFDM
Rx Sensitivity	-95.7 dBm @1 DSSS -74.0 dBm @54 OFDM
Maximum Radio Range	200m (L.O.S), Radio range be extended by adding Wifi Bridge/Repeater
Antenna	Antenna diversity : 2 omnidirectional antenna with a gain of 2.8 dBi
OTA	Over the air firmware upgrade via WIFI

USB SPECIFICATIONS

USB standard	USB 2.0
Data Rate	Full speed operation(12MB/s)
Related functions	<ul style="list-style-type: none"> • Firmware update • Wifi & system configuration

EMBEDDED DATA LOGGER

Storage Capacity	up to 5 million data points
Wireless data downloading	3 minutes to download the full memory (average time)

ENVIRONMENTAL AND MECHANICAL

Casing	Aluminum casing Dimensions in mm (LxWxH):35x59x65 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 220g
IP NEMA Rating	IP67 Nema 6
Shock resistance	100g during 50 ms
Operating Temperature	-40 °C to +65 °C
Norms & Radio Certifications	<ul style="list-style-type: none"> • CE Labelling Directive R&TTE (Radio) ETSI EN 300 328(Europe) • FCC (North America) • ARIB STD-T66 Ver. 3.6 (Japan) • ROHS - Directive 2002/95/EC

POWER SUPPLY

Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 900 mAh
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring
Battery Life	see Battery life table herefater and battery life simulation toolkit available on our website
External power supply	<ul style="list-style-type: none"> •USB Power supply 5V •Optional auxiliary external Power Supply: 8VDC to 24VDC compatible with solar energy harvesting

INCLUDED ACCESSORIES

M8 plastic cap	1pcs, Ref: WL-PC
M8 to USB cable	1pcs M8-6pins to USB Cable, 2 meters length. Ref: WL-CBL-M8-6P-USB-2M
Magnet for power on/power off	1pcs Magnet. Ref: WL-MGN
Wall mounting kit	4 pcs M5 screws+ Locknut. Ref: WL-WIFI-SCMKIT

OPTIONAL ACCESSORIES AND SERVICES

Power-supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with USB plug. Provided with power adapter: North America/Japan/China or Europe or UK or Australia REF: WL-USB-5V-PWR
M8 Cable	M8-6Pins Cable, Waterproof (IP67) and shielded cable , cable length : • 2 meters. Ref: WL-CBL-M8-6P-2M • 5 meters. Ref: WL-CBL-M8-6P-5M
Standalone solar power system	High efficiency solar panel with Solar charging controller and Lead-acid battery Ref.: X-SOL-7AH-20W-5V-5M for USB power Ref.: X-SOL-7AH-20W-12V-5M for- EHR VERSION Ref: X-SOL-14AH-20W-4CH-5V-5M for USB power Ref: X-SOL-14AH-20W-4CH-12V-5M for -EHR VERSION Ref: X-SOL-14AH-80W-4CH-5V-5M for USB power Ref: X-SOL-14AH-80W-4CH-12V-5M for -EHR VERSION More options and references are available on X-SOLAR datasheet

OPTIONAL ACCESSORIES AND SERVICES

Solar Panel	Polycrystalline Solar Panel for BeanDevice® Wilow® power supply Maximum Power : 5W , Optimum operating Voltage: 12 VDC Protection Frame: Aluminum Frame , Waterproof IP67 The 3W solar panel works only with LowDutyCycle & Survey/Alarm data acquisition with battery saver mode enabled The 5W solar panel works only with LowDutyCycle, Survey/Alarm & streaming burst data acquisition with battery saver mode enabled Country of origin: solar panel from China, assembled and tested in Germany REF: WL-SLP-5W-2M ,5W Solar panel with 2 meters of cable length REF: WL-SLP-5W-5M ,5W Solar panel with 5 meters of cable length
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876 Ref: WL-CERT-CAL

Conditions: Battery saver mode enabled , Temperature 25degC, BeanDevice listening to new config every 18h	Battery Life with Slow Measurement Rate (LDCDA) Internal LiPO Battery
Battery Saver mode Enabled, Measurement Cycle every minute	40 days
Battery Saver mode Enabled, Measurement Cycle every 5 minutes	72 days
Battery Saver mode Enabled, Measurement Cycle every hour	88 days

BeanDevice® WILLOW® AX-3D

Conditions: Battery saver mode enabled , Temperature 25degC, BeanDevice listening to new config every 18h

Battery Saver mode Enabled, Measurement Cycle 20s to 1 measurement per day

Battery Life with Slow Measurement Rate (LDCDA) External 5W Solar Panel (REF: WL-SLP-5W-2M) EHR Option

>= 3 years (depends on battery cycle life)

Conditions: Battery saver mode enabled Temperature 25degC

Wakes up every 2 hours, Sample at 200Hz during 20s

Wakes up every 1 hour, Sample at 500Hz during 20s

Wakes up every 20 minutes, Sample at 200Hz during 20s

Battery Life with Fast Measurement Rate [Streaming Burst]- Internal Battery

54 days

34.5 days

18 days

Conditions: Battery saver mode enabled Temperature 25degC

All timing combinatiois related to streaming burst option

Battery Life with Fast Measurement Rate (Streaming Burst)- with X-SOLAR-7AH or X-SOLAR-14AH

>= 3 years (depends on battery cycle life)

Conditions: 25degC

Sampling Rate 2000Hz

Sampling Rate 1000Hz

Sampling Rate 100Hz

Battery Life with Fast Measurement Rate (Continuous Streaming)- Internal Battery

11hours 52 minutes

13hours 41 minutes

19hours 46 minutes

Conditions: 25degC


Sampling Rate 10Hz to 2000Hz

Internal Battery Life with Fast Measurement Rate (Continuous Streaming)-with X-SOLAR-7AH or X-SOLAR-14AH

>= 3 years (depends on battery cycle life)


BeanDevice® WILOW® AX-3D

BEANDEVICE® WILOW® FRONT VIEW

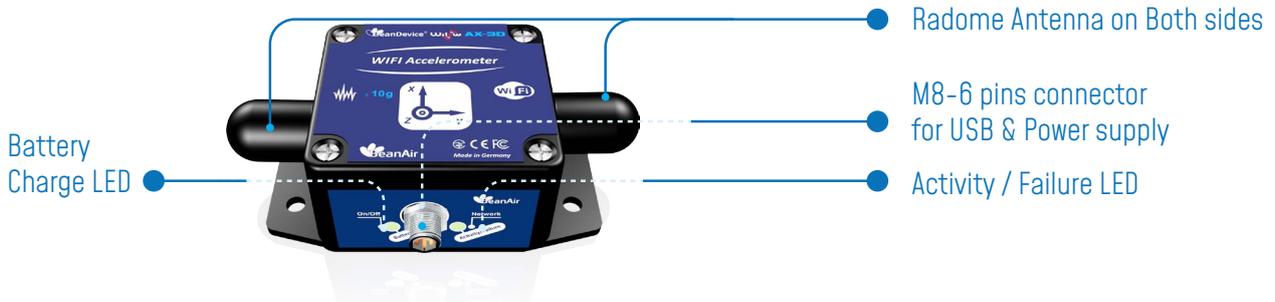



EXTERNAL POWER SUPPLY WIRING CODE

M8-6Pins socket [Male, A-Coding] - PIN ASSIGNATION

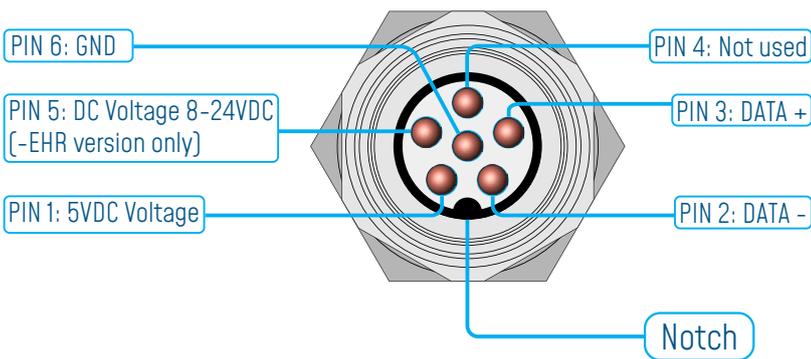

Interface Name	M8 Pin assignment
5VDC Voltage	PIN 1
DATA -	PIN 2
DATA +	PIN 3
Not used	PIN 4
DC Voltage 8-24VDC (-EHR version only)	PIN 5
GND	PIN 6

M8-6Pins Plug [Female, A-Coding] - PIN ASSIGNATION

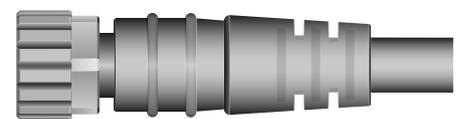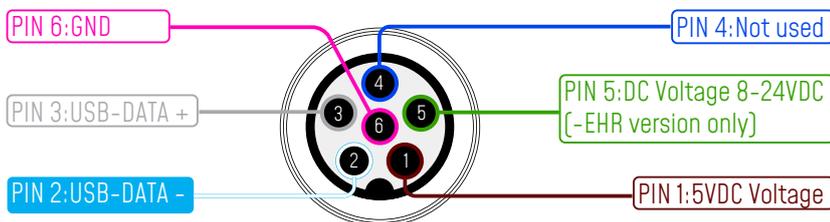

M8-6Pins Plug

Interface Name	5VDC Voltage	USB DATA -	USB DATA +	Not used	DC Voltage 8-24VDC (-EHR version only)	GND
M8 Pin assignment	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6
Wire Color [A-coding]	BROWN	WHITE	GREY	BLUE	GREEN	PINK

BeanDevice® WILOW® AX-3D

MECHANICAL MOUNTING OPTIONS

By default, the **BeanDevice® Wilow®** comes with a screw mounting lid.

Two other mounting options are available:

- Magnetic mounting, add the extension -M on your product reference
- 90° bracket, add the extension -BR on your product reference



Mechanical Mounting Options Video



CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.facebook.com/BeanAir



www.beanair.com



www.youtube.com/user/BeanairSensors



www.twitter.com/beanair



Above given technical data are only for information purpose.

BEANAIR® GmbH has right to change product specifications without notice.